

# nifty

# HR12

**SELF PROPELLED  
ACCESS PLATFORM**



**12.20m (40ft)**  
Working Height

**6.10m (20ft 1in)**  
Working Outreach

**Telescopic Upper  
Boom**

Greater accuracy when  
positioning platform

**Weight Under 3 Tonnes**  
Low cost transportation

**1.50m Narrow  
Chassis Available**  
Improved narrow aisle access

**Fully Proportional  
Hydraulic Controls**  
Designed for maximum  
operator efficiency

**Bi-Energy Power  
Available**  
Optimising utilisation



**niftylift.com**





# nifty

## Heightrider 12

The Nifty Height Rider 12 is one of the most versatile and reliable machines in it's class. It is specifically designed to give maximum reach performance from the lightest, most compact base possible. A telescopic upper boom gives improved accuracy when positioning the platform and superb manoeuvrability makes it an ideal tool for a wide range of applications.

### Safety Features

- ▶ Automatic failsafe brakes
- ▶ Tilt alarm
- ▶ Foam filled or solid tyres
- ▶ Emergency descent system with hand-pump
- ▶ Dual controls (platform & base)
- ▶ Lock valves on all hydraulic cylinders
- ▶ Dual harness points
- ▶ CE Mark

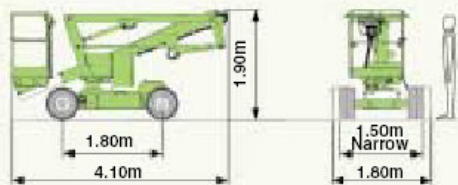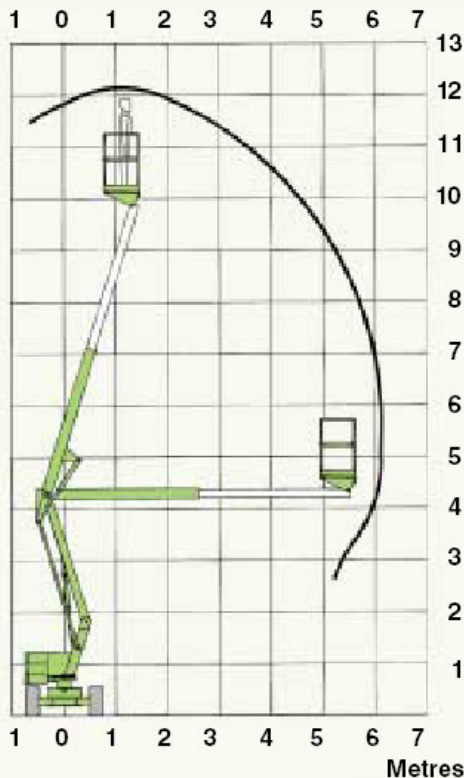

The Height Rider 12 combines robust construction with compact, low weight design. The Bi-Energy option allows it to work for extended periods inside and outside making it the perfect all-rounder.

### Specifications

Working Height	12.20m	40ft
Platform Height	10.20m	33ft 5in
Working Outreach	6.10m	20ft 1in
Width [Standard]	1.80m	5ft 10in
[Narrow]	1.50m	4ft 11in
Height Stowed	1.90m	6ft 3in
Overall Length	4.10m	13ft 5in
Weight [Standard]	2400kg	5285lbs
[Narrow]	2950kg	6490lbs
Turning Radius (inside)	2.22m	7ft 3in
(outside)	4.20m	13ft 9in
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.65m	3ft 8in x 2ft 1in
Tyres	Foam filled, solid or non-marking	
Brake System	Dual automatic failsafe braking system	
Control System	Fully proportional hydraulic controls	
Power Options	Bi-Energy (engine and battery)	
	Battery only	
	Petrol or diesel engine only	

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:



**douwes materieel bv**

de rysloane 2 - 9281 km harkema  
 telefoon 0512-364499 fax 365152  
 email: info@materieel.com  
 k.v.k. leeuwarden nr. 01085043  
 btw nr. NL 809582181B01

Manufacturers of trailer mounted,  
 self propelled and vehicle mounted  
 platforms



**Niftylift Ltd**

Fingle Drive  
 Stonebridge  
 Milton Keynes  
 MK13 0ER  
 England

www.niftylift.com

e.mail: info@niftylift.com

Tel: +44 (0)1908 223456

Fax: +44 (0)1908 312733